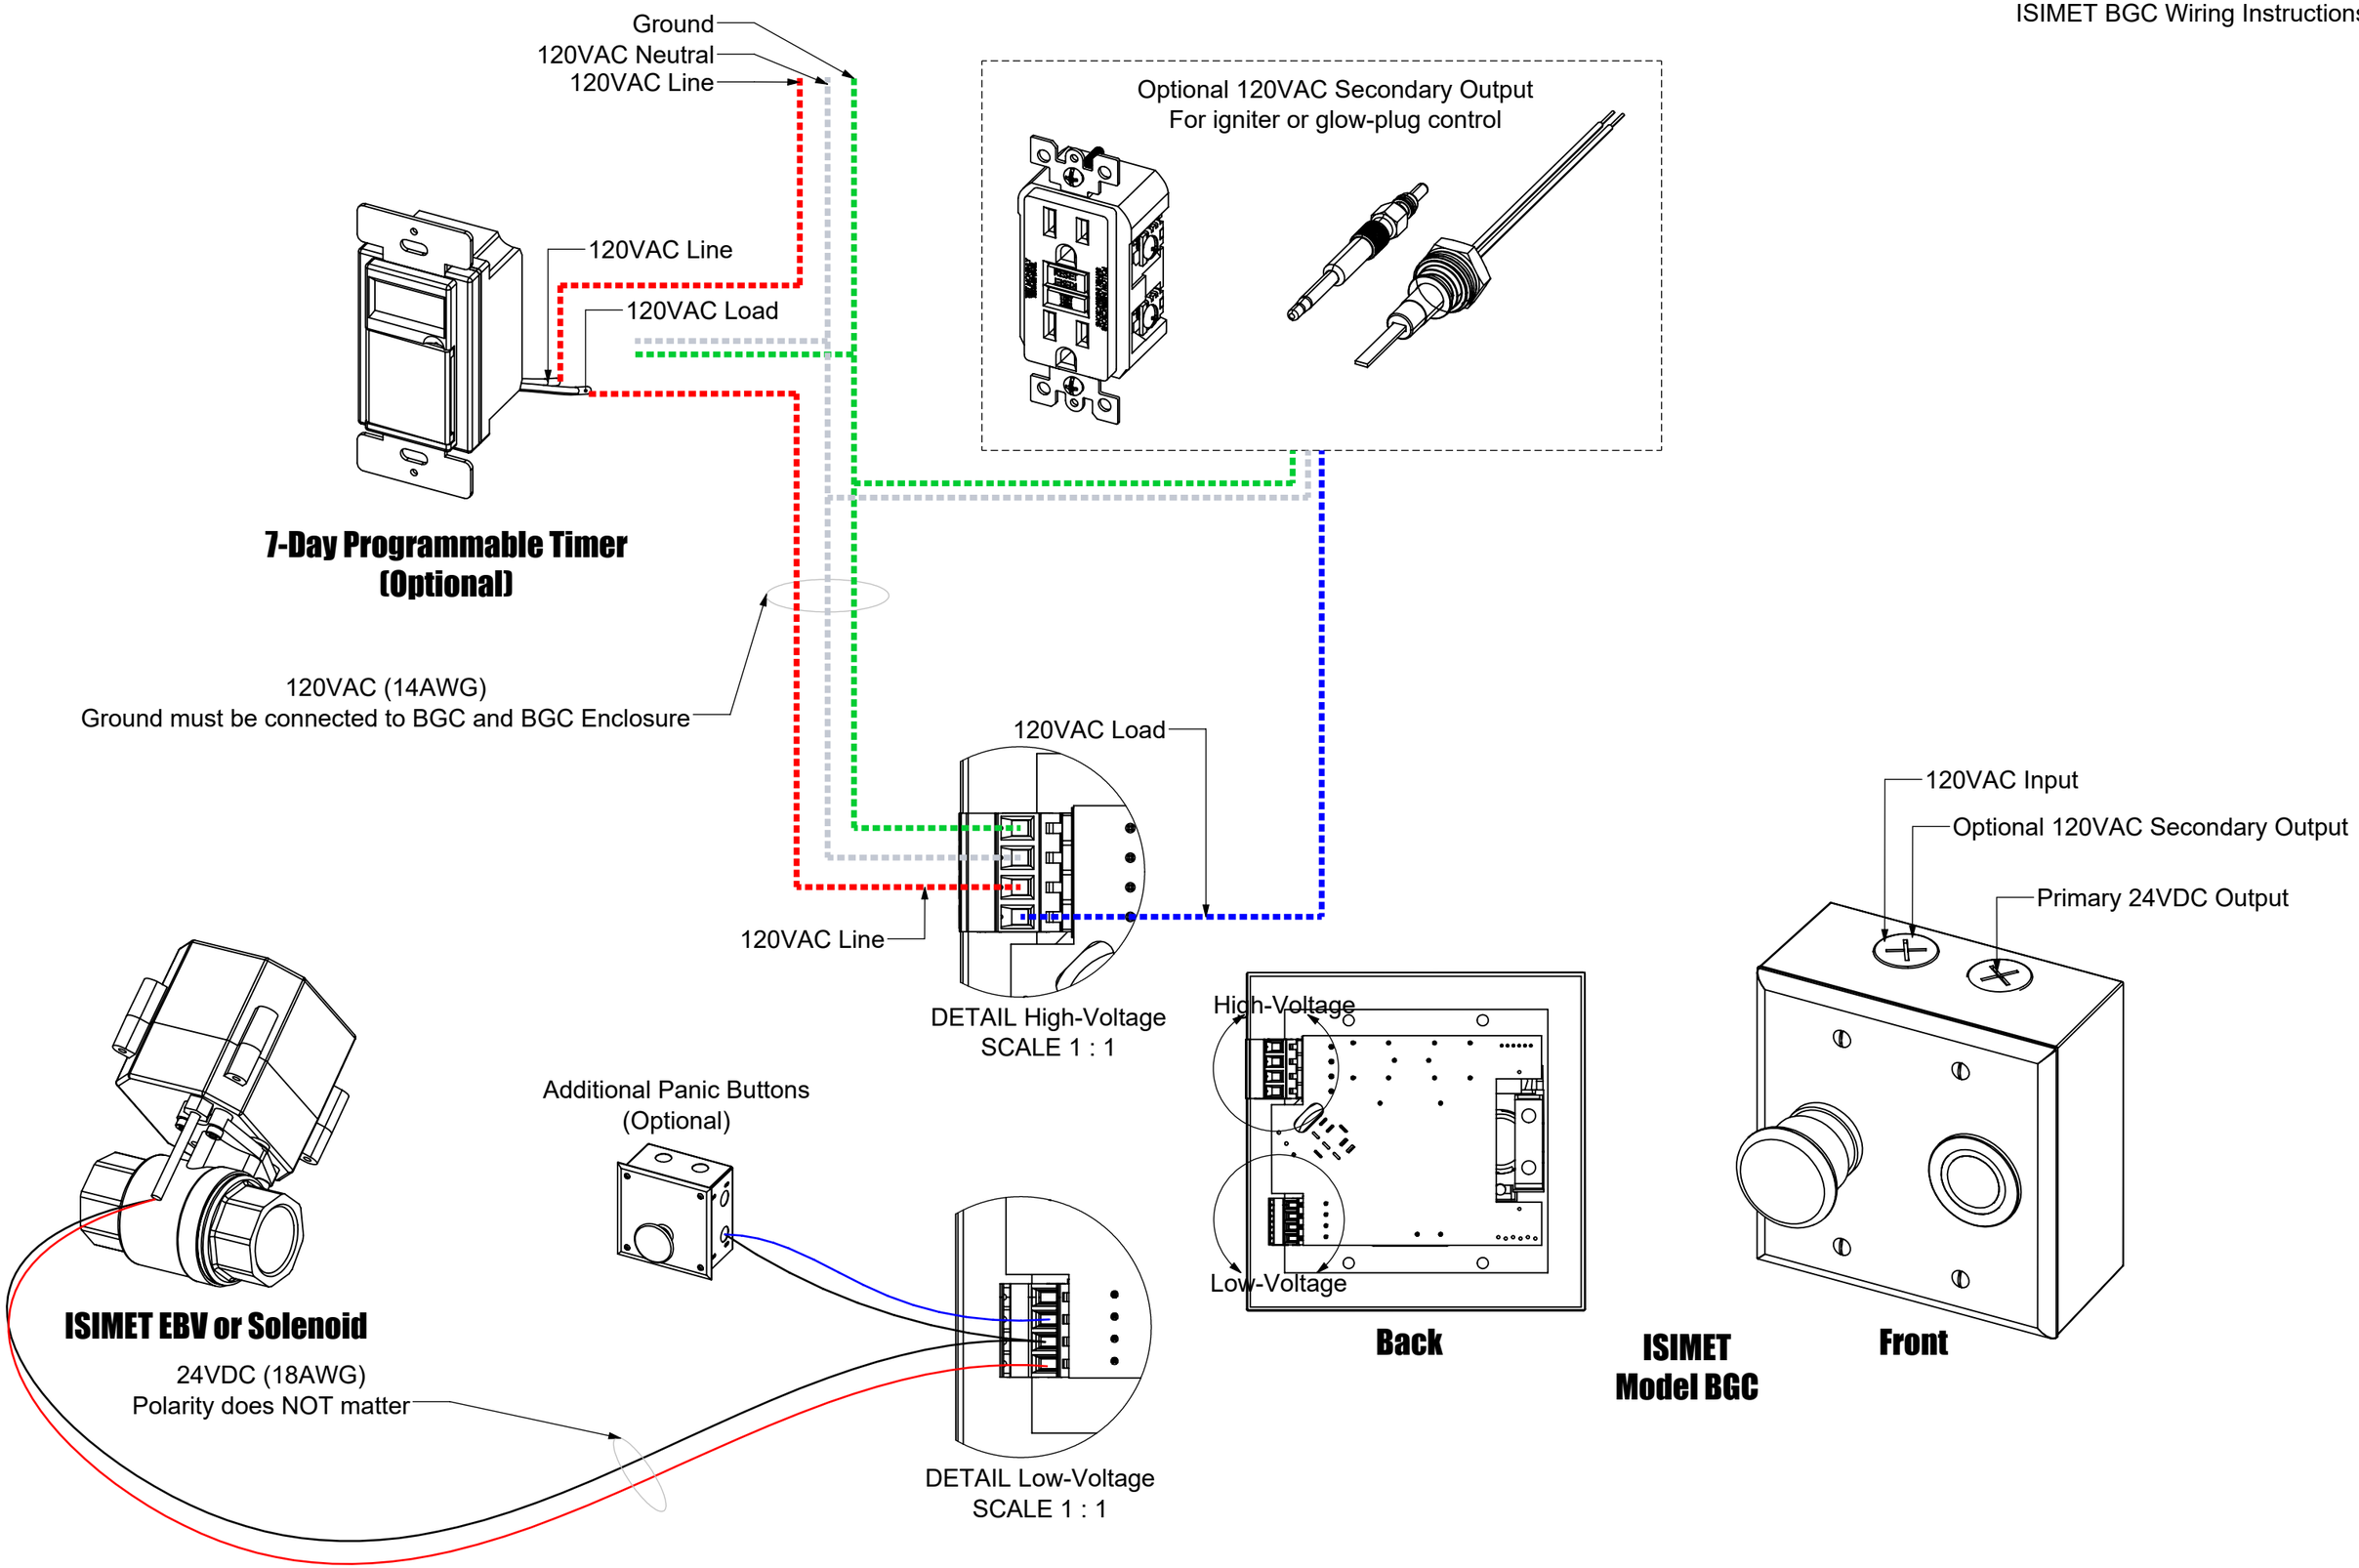
Ground
120VAC Neutral
120VAC Line
Optional 120VAC Secondary Output
For igniter or glow-plug control
120VAC Line
120VAC Load
7-Day Programmable Timer
(Optional)
120VAC (14AWG)
Ground must be connected to BGC and BGC Enclosure
120VAC Load
120VAC Line
DETAIL High-Voltage
SCALE 1 : 1
High-Voltage
Low-Voltage
Back
120VAC Input
Optional 120VAC Secondary Output
Primary 24VDC Output
Front
ISIMET
Model BGC
Additional Panic Buttons
(Optional)
ISIMET EBV or Solenoid
24VDC (18AWG)
Polarity does NOT matter
DETAIL Low-Voltage
SCALE 1 : 1