



## Panic Button (IPO) Submittal

### Equipment Specifications Model #:

#### Remote Panic:

- ☐ Momentary [One (1) N/O Contact] (Standard)
- ☐ Momentary [Two (2) N/O Contacts]
- ☐ Momentary [One (1) N/O & One (1) N/C Contact]
- ☐ Manual Reset, Maintained [One (1) N/O & One (1) N/C Contact]
- ☐ Keyed Reset, Maintained [One (1) N/O & One (1) N/C Contact]

#### Additional Options:

- ☐ Clear, Flip-up Protective Cover
- ☐ Weatherproof Panel
- ☐ Powder Coated Wall Panel with Stainless Screws (Flush Mount Only)
- ☐ Stainless Steel Wall Box (Surface Mount Only)

#### IPO (Panic Button) Assembly

- Emergency Shut-Off Button
- Junction Box
- Contact Block
- Mounting Hardware

#### Output: Dry-Contact (500mA Max)


- NO (Normally-Open) Solid-State Relay.
- Closes contact on medium detection.

**Enclosure Dimensions:** 5.0"H x 5.0"W x 3.0"D **Front Panel:** 5.25"H x 5.25"W

#### Mounting Location:

- All Points of Egress when used with one of ISIMET's Utility Controllers.
- ADA compliant height.

ISIMET JOB #: \_\_\_\_\_

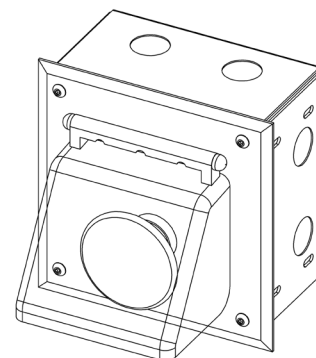

**IPO-C**

Project Owner:

Project Name:

Project Address:

Notes: