

SAFETY

IT'S IN YOUR CONTROL



Utility Safety Controls
Since 2000



3.5" deep

12" high

10" wide

ISIMET® UtC Laboratory Utility Control Package

- Allows the instructor to independently control gas, electricity, water and fan; key-activated to protect against unauthorized use, accidents and vandalism
- Programmable timer automatically turns off utilities when classroom is not in use
- Utilities default OFF until emergency has been resolved and teacher activates system
- Complete System includes utility controller, remote panic button, fuel gas sensor, monitoring beacon, emergency shower monitor and enclosures
- Emergency shut-off button deactivates utilities and turns exhaust fan on; fire alarm turns fan off
- Fuel Gas Sensor detects gas leaks; disables gas
- Monitoring Beacon visually indicates location of emergency
- Emergency Shower Monitor notifies if water is flowing

Why use a **Complete** ISIMET System?



Gas leaks in a science lab can result in explosions. ISIMET **DETECTS** gas leaks and disables gas to prevent accidents.



Water vandalism in science labs results in millions of dollars of damage to schools every year. ISIMET **NOTIFIES** building management of running water thereby reducing vandalism.



Electricity is responsible for 67% of all lab fires. ISIMET **DISABLES** electricity when classroom is not in use.

Simple emergency stops don't detect gas leaks, notify regarding vandalism or disable utilities when not in use.



**UL LISTED SYSTEM MEETS OR EXCEEDS:
NFPA45, NFPA54, NFPA101, IFGC409**


For suggested specifications and CAD drawings, please visit www.isimet-mapa.com/lp1/

Helps keep students, teachers and facilities safe

ISIMET® Complete Science Lab Utility Safety Package

3 Utilities (Gas, Water, Electricity) + Fan

Typical Science Classroom Layout:

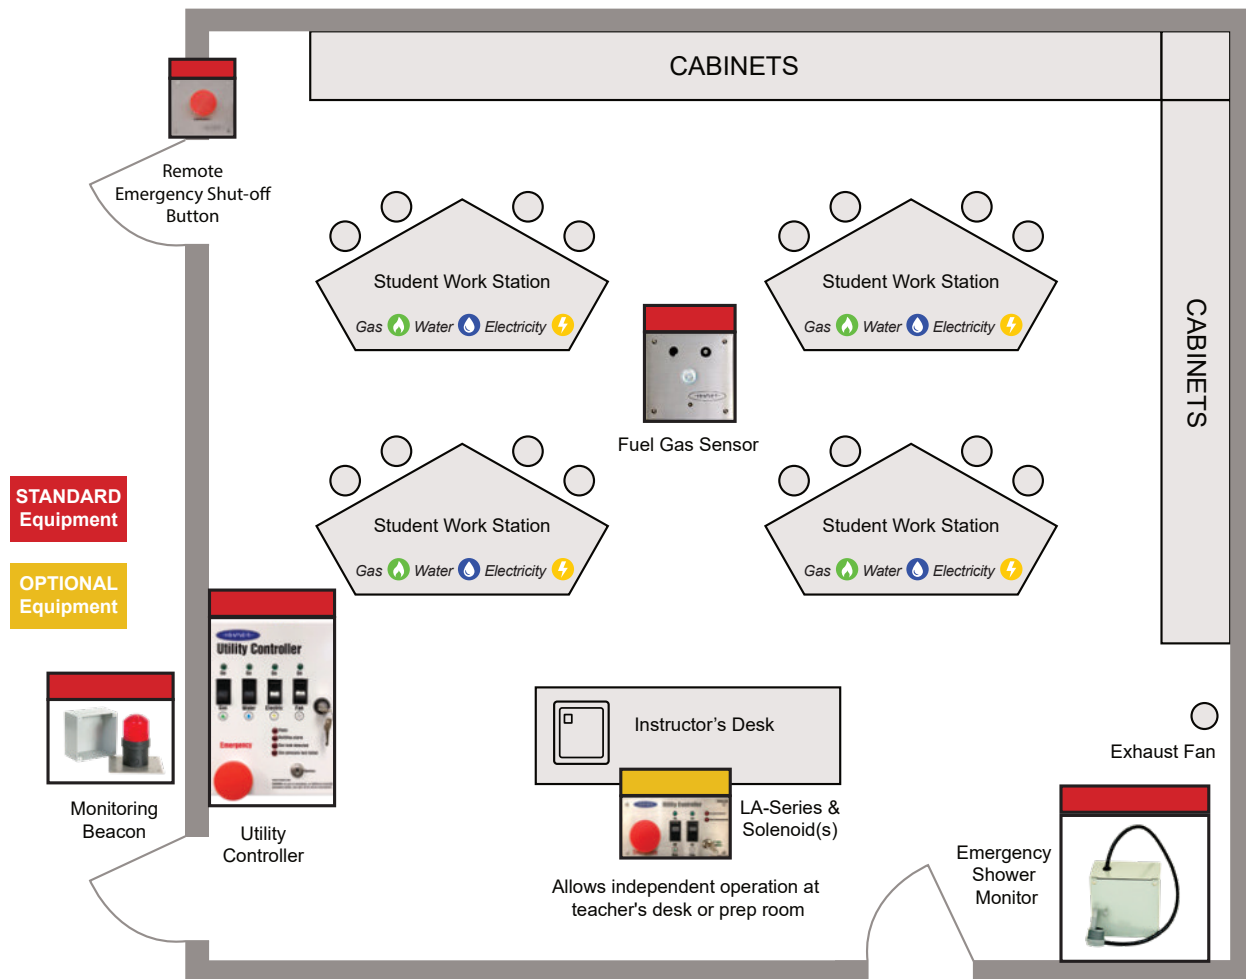

UtC Package Typically Includes:

- | | |
|--|---|
| <ul style="list-style-type: none"> (1) Utility Controller: <ul style="list-style-type: none"> • 120 VAC Input w/ 24 VAC Output • Flush Mount • 4-Switch Front • Metal Box, Gray • Metal Door, White (1) S-Series Enclosure: <ul style="list-style-type: none"> • (1) 24 VAC Gas Solenoid (3/4") • (2) 24 VAC Water Solenoids (1") • Unions and Y strainer • (1) Box and door <ul style="list-style-type: none"> - Flush Mount - Metal Box, Gray - Metal Door, White | <ul style="list-style-type: none"> (1) E-Series Enclosure: <ul style="list-style-type: none"> • Surface Mount • Metal Box, Gray • Metal Door, Gray (1) Remote Panic Button (1) Emergency Shower Monitor (notifies if water is flowing) (1) Monitoring Beacon (1) Fuel Gas Sensor <p>Options:</p> <ul style="list-style-type: none"> • Gas Pressure Transmitter • LA-Series • Trim Plate 12.35" w x 14.35" h |
|--|---|



Utility Safety Controls
Since 2000

www.isimet.com | (903) 781-6994